




SUPERFLO LIQUID FILTERS (EFL/EFS)

Permanent magnet and reusable filter screen trap ferrous particles, scale and contaminants to prevent costly damage. Collects up to 20 cu. in. of material without pressure drop. Available in 11¹/₄" length single cartridge model (EFS) or 19³/₄" length dual cartridge model (EFL). Teflon-coated cast aluminum housing with stainless steel cartridge. Reusable stainless steel cartridges available in 30 (590), 60 (250), 100 (149), and 150 (99) mesh (micron). 1" NPT intake. Dual 1" NPT discharge ports; 3/4" NPT reducers provided.

SURGE SUPPRESSOR/FILTER FOR DOUBLE DIAPHRAGM SERIES PUMPS (DDPSF)

Enables smooth filtered flow from reciprocating-type pumps. Comes with pinch valve and is available in 30, 60, 100, and 150 mesh filtration. Teflon coated cast aluminum housing with stainless steel cartridge. 1" NPT bottom intake and dual 3/4" NPT discharge ports. Corrosion-resistant Teflon finish. See price list for model numbers. Available in 30 (590), 60 (250), 100 (149), and 150 (99) mesh (micron).

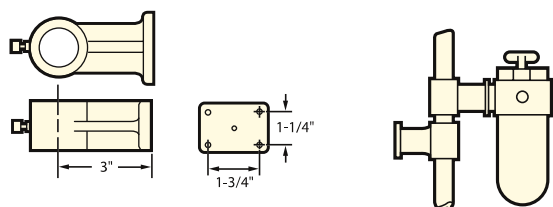

C-28953

UNIVERSAL MOUNTING BRACKETS (C-28953)

Cast aluminum multi-purpose bracket for filters and surge suppressors.



A.



B.



D.



C.



E.

**FRL-1
FRL-2**

A. TANK LINERS

Reusable tank liner features built-in sump to conform to Graymills' standard round tanks. Made of high-density polyethylene. Fits Graymills' 5, 10, 20 and 30 gallon round tanks. See price list for part numbers.

B. DRUM COVER

Two-piece cover for use with TNR 36" pumps and DPH-50 pumps. Available for 55 gallon drums.

C-35858: 55 gal. cover

C. MIX55-PAM

For use on 30 and 55 gallon drums. High torque piston air motor blends at low 500-540 RPM with air consumption of 5 CFM at 80 psi. Features include: adjustable mixing speed, mixing viscosities up to 10,000 CPS, reversible impeller direction, adjustable mounting clamp.

D. NOZZLES AND COOLANT LINES

This nozzle is a replacement/option for pumping systems. Unit can be ordered assembled as shown or in separate components. Consult price list for various sizes available.

E. FILTER/REGULATOR/LUBRICATOR

Removes contaminants and moisture from compressed air while adding oil mist for lubrication. Available for air motors with 1/8" or 1/4" inlet and outlet. 1/4" model includes 0-160 PSI gauge. 1/8" "piggyback"- style filter regulator also available for 1/2" DDP pump. See price list.